

Flowpod 3000DL MK2

Water Utilities - Flow Measurement

Portable Flow & Pressure Test Instrument with Data Logger

The Flowpod 3000 DL MK2 is a lightweight version of the Flowmaster 250 DL MK2. It provides reliable and accurate flow and pressure measurements with integrated data logging at every water drawing off point.

Integrated data logging enables up to 360 hours of measurement storage, with easy download to a PC for graphing, analysis and report generation.

Applications


- Hydrant Testing
- Flushing
- Trunk Main Conditioning
- Minimum Night Flow Measurement

Features


- Ease of Use
- Electromagnetic Sensor - No Moving Parts
- Lightweight & Portable
- Rechargeable battery, 10 hours operation, 12 V DC, 2.2 Ah



All Information On One Display




Units of Choice

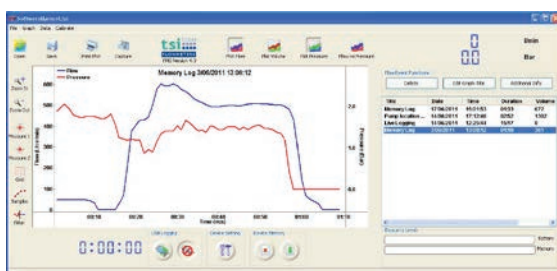

FMS Software



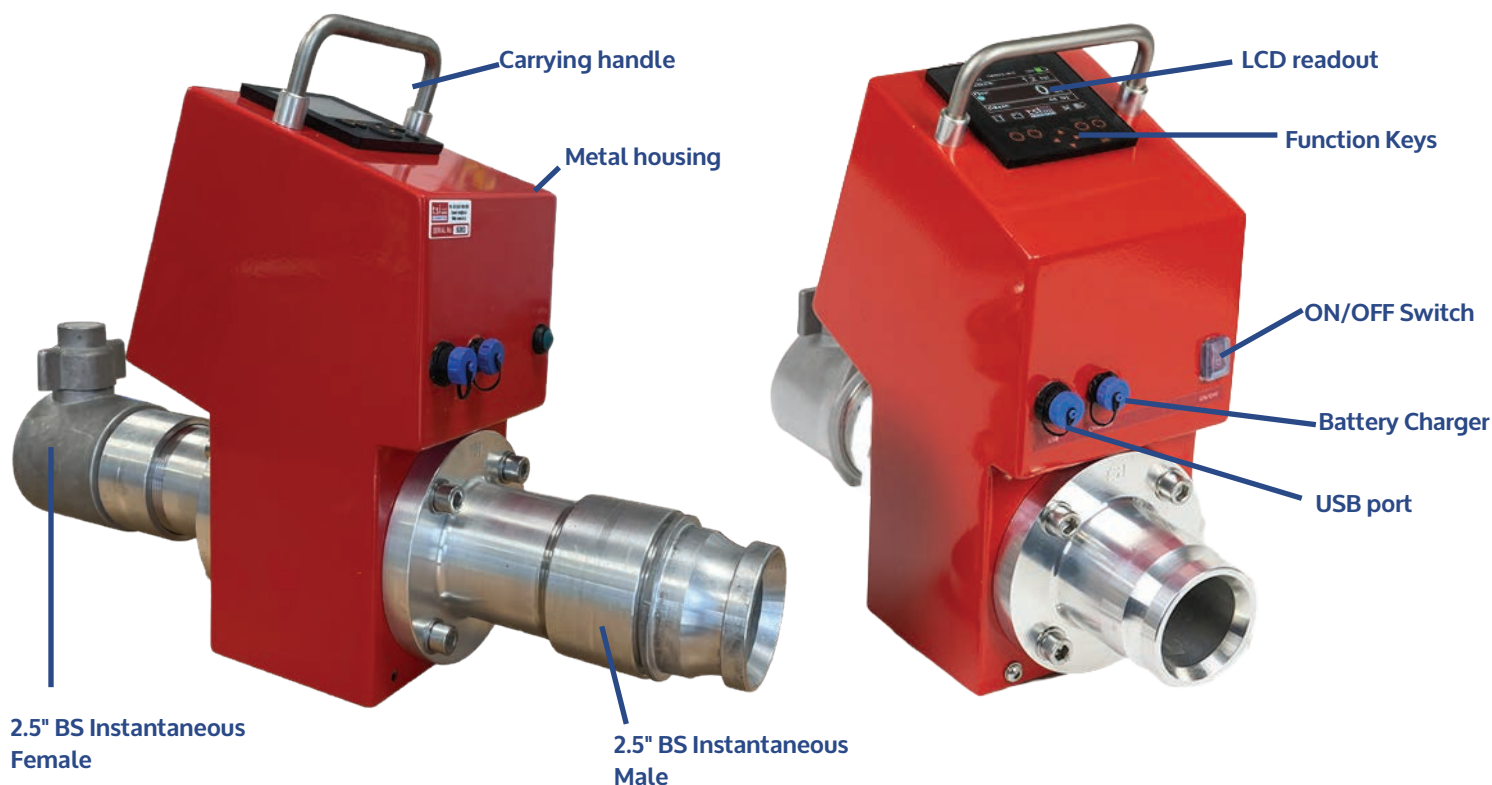

Lightweight & Portable



Clear Readout Display



Simple and Easy to use



Robust Engineering

Other Adaptors Available Including:



Storz 65/B/C



NH (National Hose)



Ball Valve/Gate

Travel Case Available

with interior compartments for Flowpod & accessory kit, castor wheels & handle.



Technical Data Flowpod 3000 MK2

(EN ISO 12100-1, EN ISO 12100-2, EN 60204)

Battery power supply: rechargeable battery, 10 hours operation, 12 V DC, 2.2 Ah, separate charger included with delivery.
Working temperature: -10 to +50°C.
Connections: B.S. Instantaneous Couplings / Storz / NH.
Dimensions ~ Height: 350 mm, Width: 160 mm
Depth: Storz fitted - 390mm, B.S. fitted - 380mm
Weight: 7 kg.
Housing: Metal.

Colour: Red.
Type: Electromagnetic.
Operating range: 30-3000 L/min (0.5 – 50 L/s, 1.8 – 180 M3/h).
Accuracy: 30 to 750 L/min ± 15 L/min, >750 L/min $\pm 2\%$.
Standard functions: Display of current flow rate, display of volume
Display Type: 320x240 Backlit Graphic Color Display
Operating pressure: 0 - 25 bar $\pm 1\%$. Maximum pressure: 25 bar.

Part Number: 34-2052